
Sanitary/Septic Waste Management

SM-7

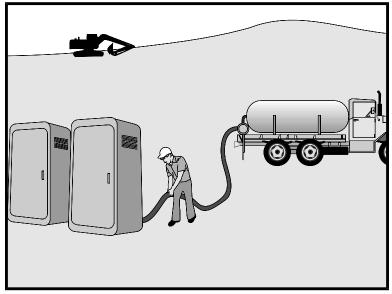

Source: Caltrans Construction Site Best Management Practices Manual, 2003.

Description

Practices and procedures to reduce or prevent the discharge of sanitary wastes from construction sites into the storm drain system or adjacent water bodies.

Applications

Construction sites containing temporary or portable sanitary/septic waste systems.

Installation and Implementation Requirements

- Locate sanitary facilities in a convenient place away from drainage facilities.
- Untreated wastewater shall not be discharged to the ground or buried.
- Comply with the State of Hawaii, Department of Health requirements when using an on-site disposal system such as a septic system.
- Avoid illicit discharges by properly connecting temporary sanitary facilities to the sanitary sewer system.
- Sanitary/septic systems discharging to the sanitary sewer shall comply with the local wastewater treatment plant requirements.
- A licensed service provider shall maintain sanitary/septic facilities in good working order.
- Schedule regular waste collection by a licensed transporter.

Limitations

None

Sanitary/Septic Waste Management

SM-7

Inspections and Maintenance

- Inspect and maintain facilities regularly.
- Schedule regular waste collection.
- Prevent illicit discharges.