


FED. ROAD DIST. NO.	STATE	PROJ. NO.	FISCAL YEAR	SHEET NO.	TOTAL SHEETS
HAWAII	HAW.	HIA-01-98M	1998	4	11

FARRINGTON HIGHWAY
CURVE DATA

$\Delta = 16^{\circ}02'00''$
 $R = 1,105.00'$
 $T = 155.63'$
 $C = 308.21'$
 $L_c = 309.22'$

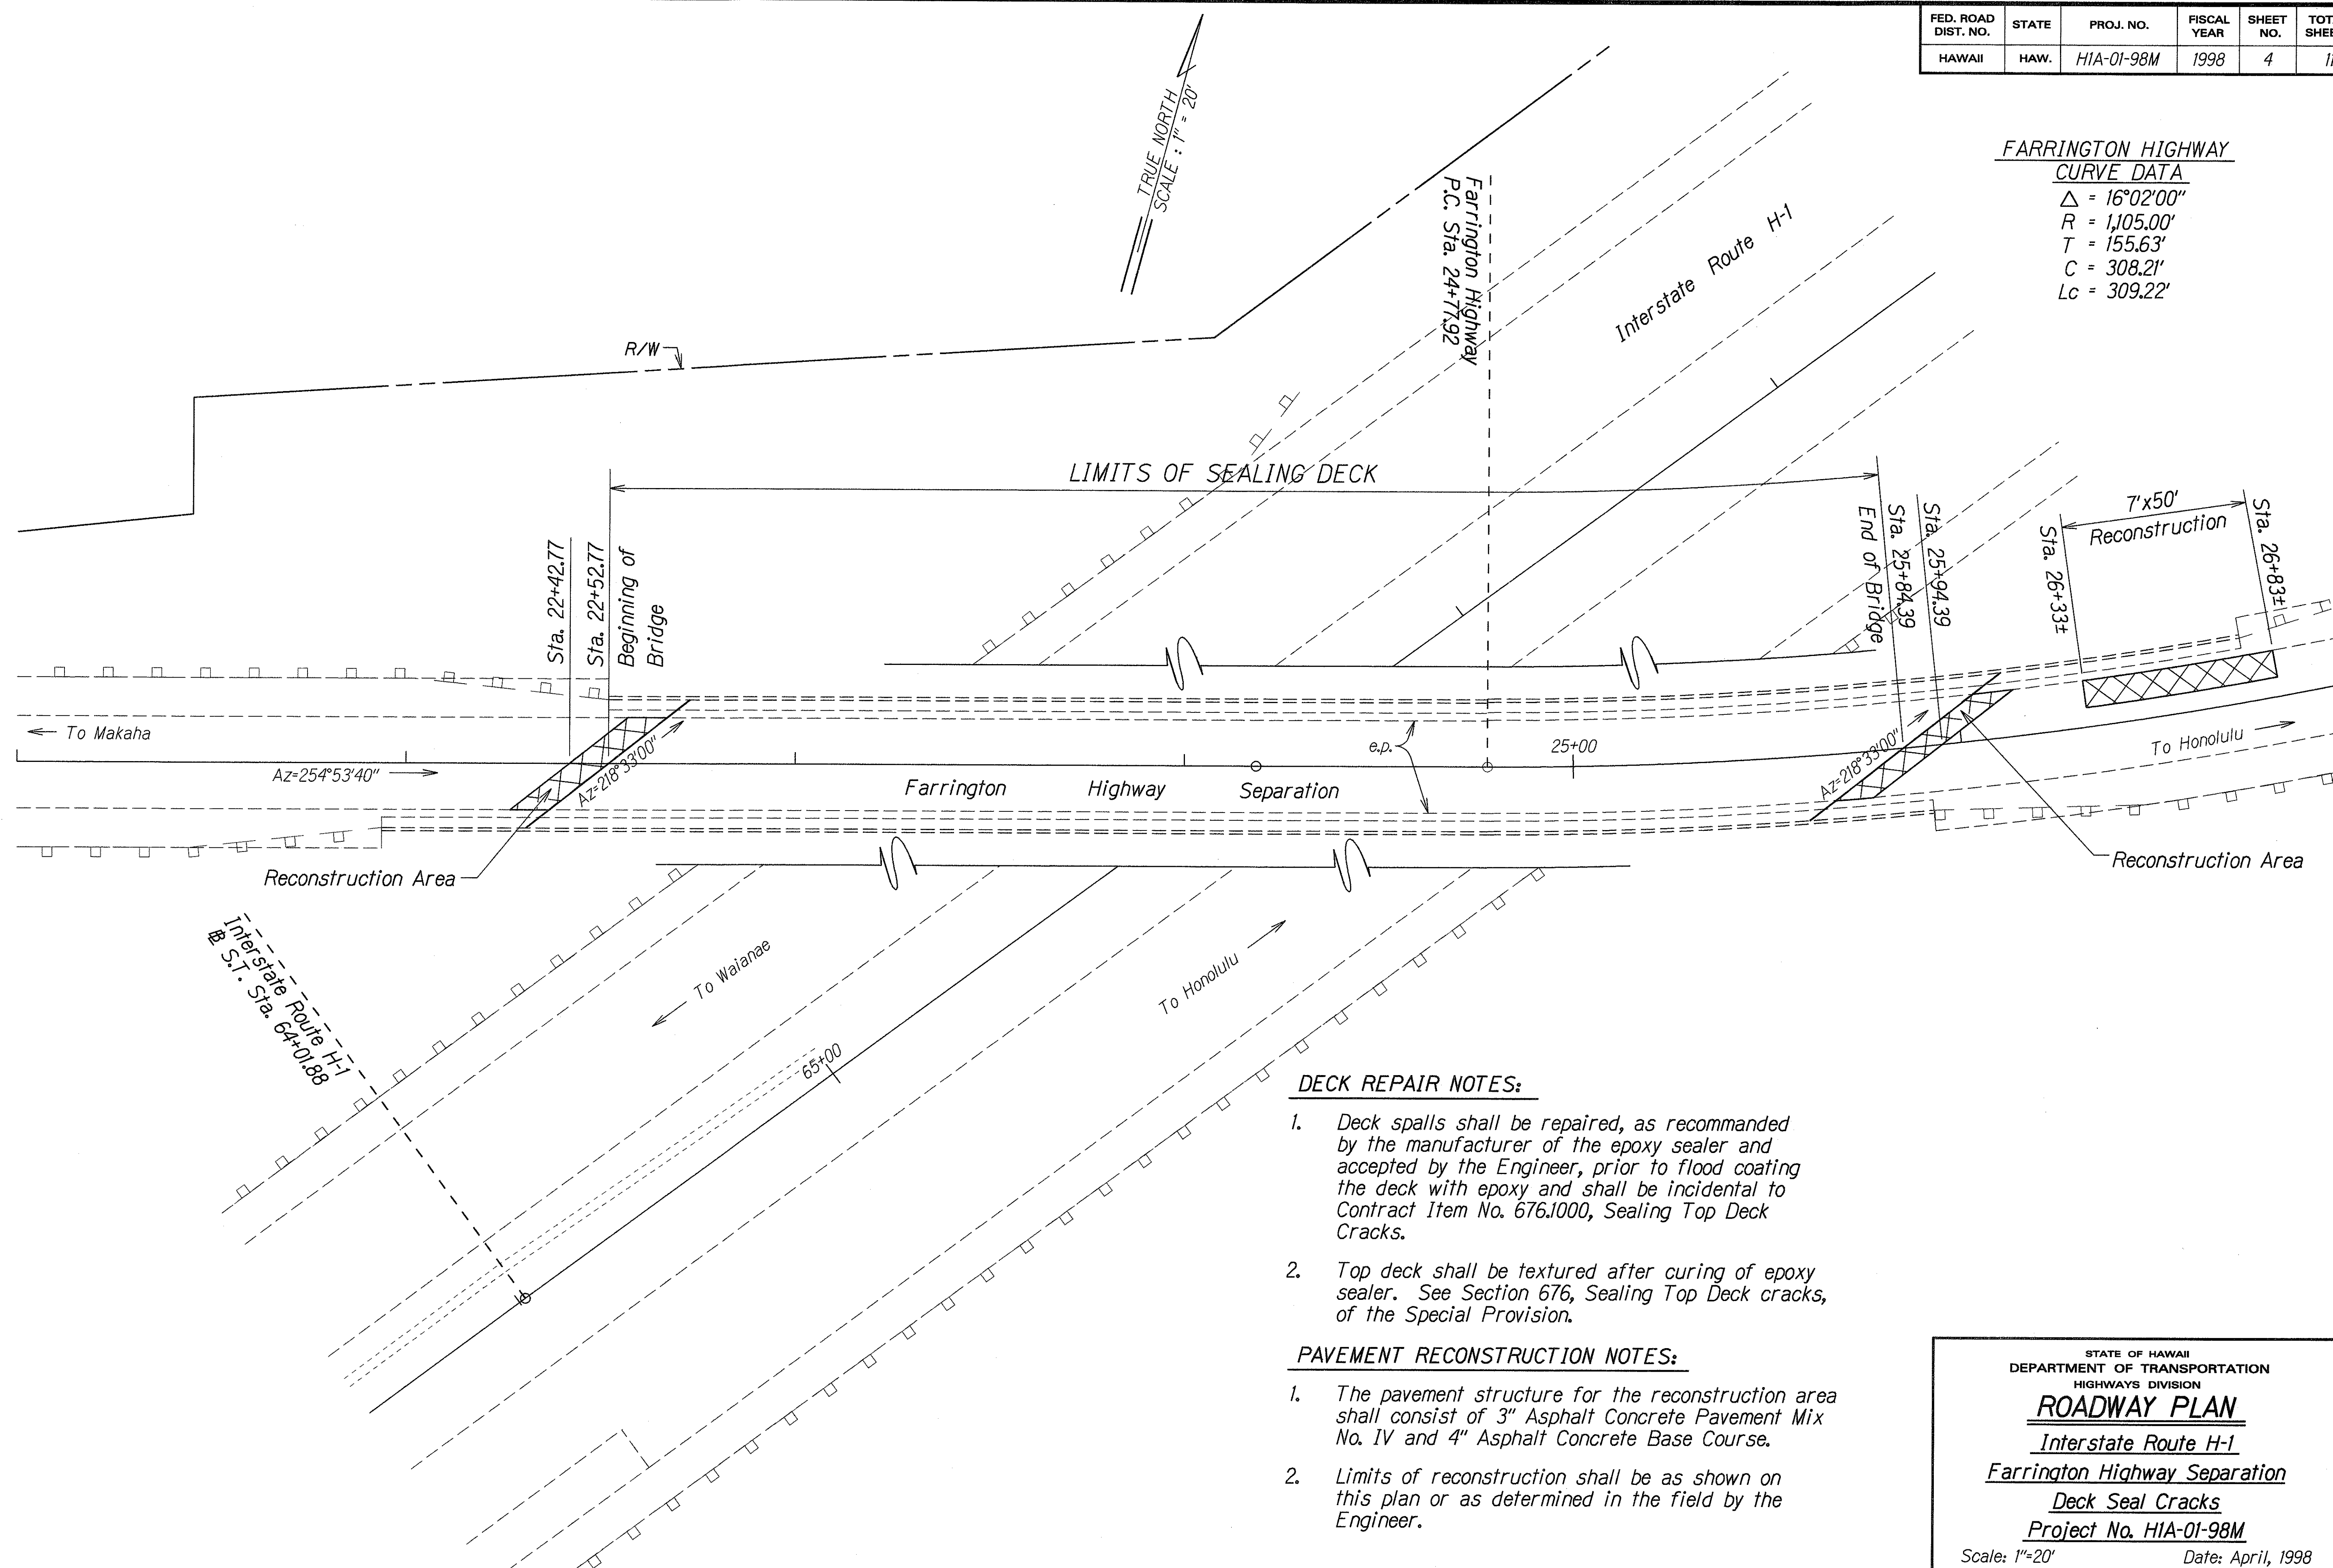

DECK REPAIR NOTES:

1. Deck spalls shall be repaired, as recommended by the manufacturer of the epoxy sealer and accepted by the Engineer, prior to flood coating the deck with epoxy and shall be incidental to Contract Item No. 676.1000, Sealing Top Deck Cracks.
2. Top deck shall be textured after curing of epoxy sealer. See Section 676, Sealing Top Deck cracks, of the Special Provision.

PAVEMENT RECONSTRUCTION NOTES:

1. The pavement structure for the reconstruction area shall consist of 3" Asphalt Concrete Pavement Mix No. IV and 4" Asphalt Concrete Base Course.
2. Limits of reconstruction shall be as shown on this plan or as determined in the field by the Engineer.

DESIGNED BY	DATE
DRAWN BY	15/21/98
CHECKED BY	
NOTED BY	
QUANTITIES BY	
ORIGINAL PLAN	

STATE OF HAWAII
DEPARTMENT OF TRANSPORTATION
HIGHWAYS DIVISION
ROADWAY PLAN
Interstate Route H-1
Farrington Highway Separation
Deck Seal Cracks
Project No. HIA-01-98M
Scale: 1"=20' Date: April, 1998
SHEET No. 1 OF 1 SHEETS