


FED. ROAD DIST. NO.	STATE	FED. AID PROJ. NO.	FISCAL YEAR	SHEET NO.	TOTAL SHEETS
HAWAII	HAW.	I-H3-I(75) UNIT III	1994	348	353

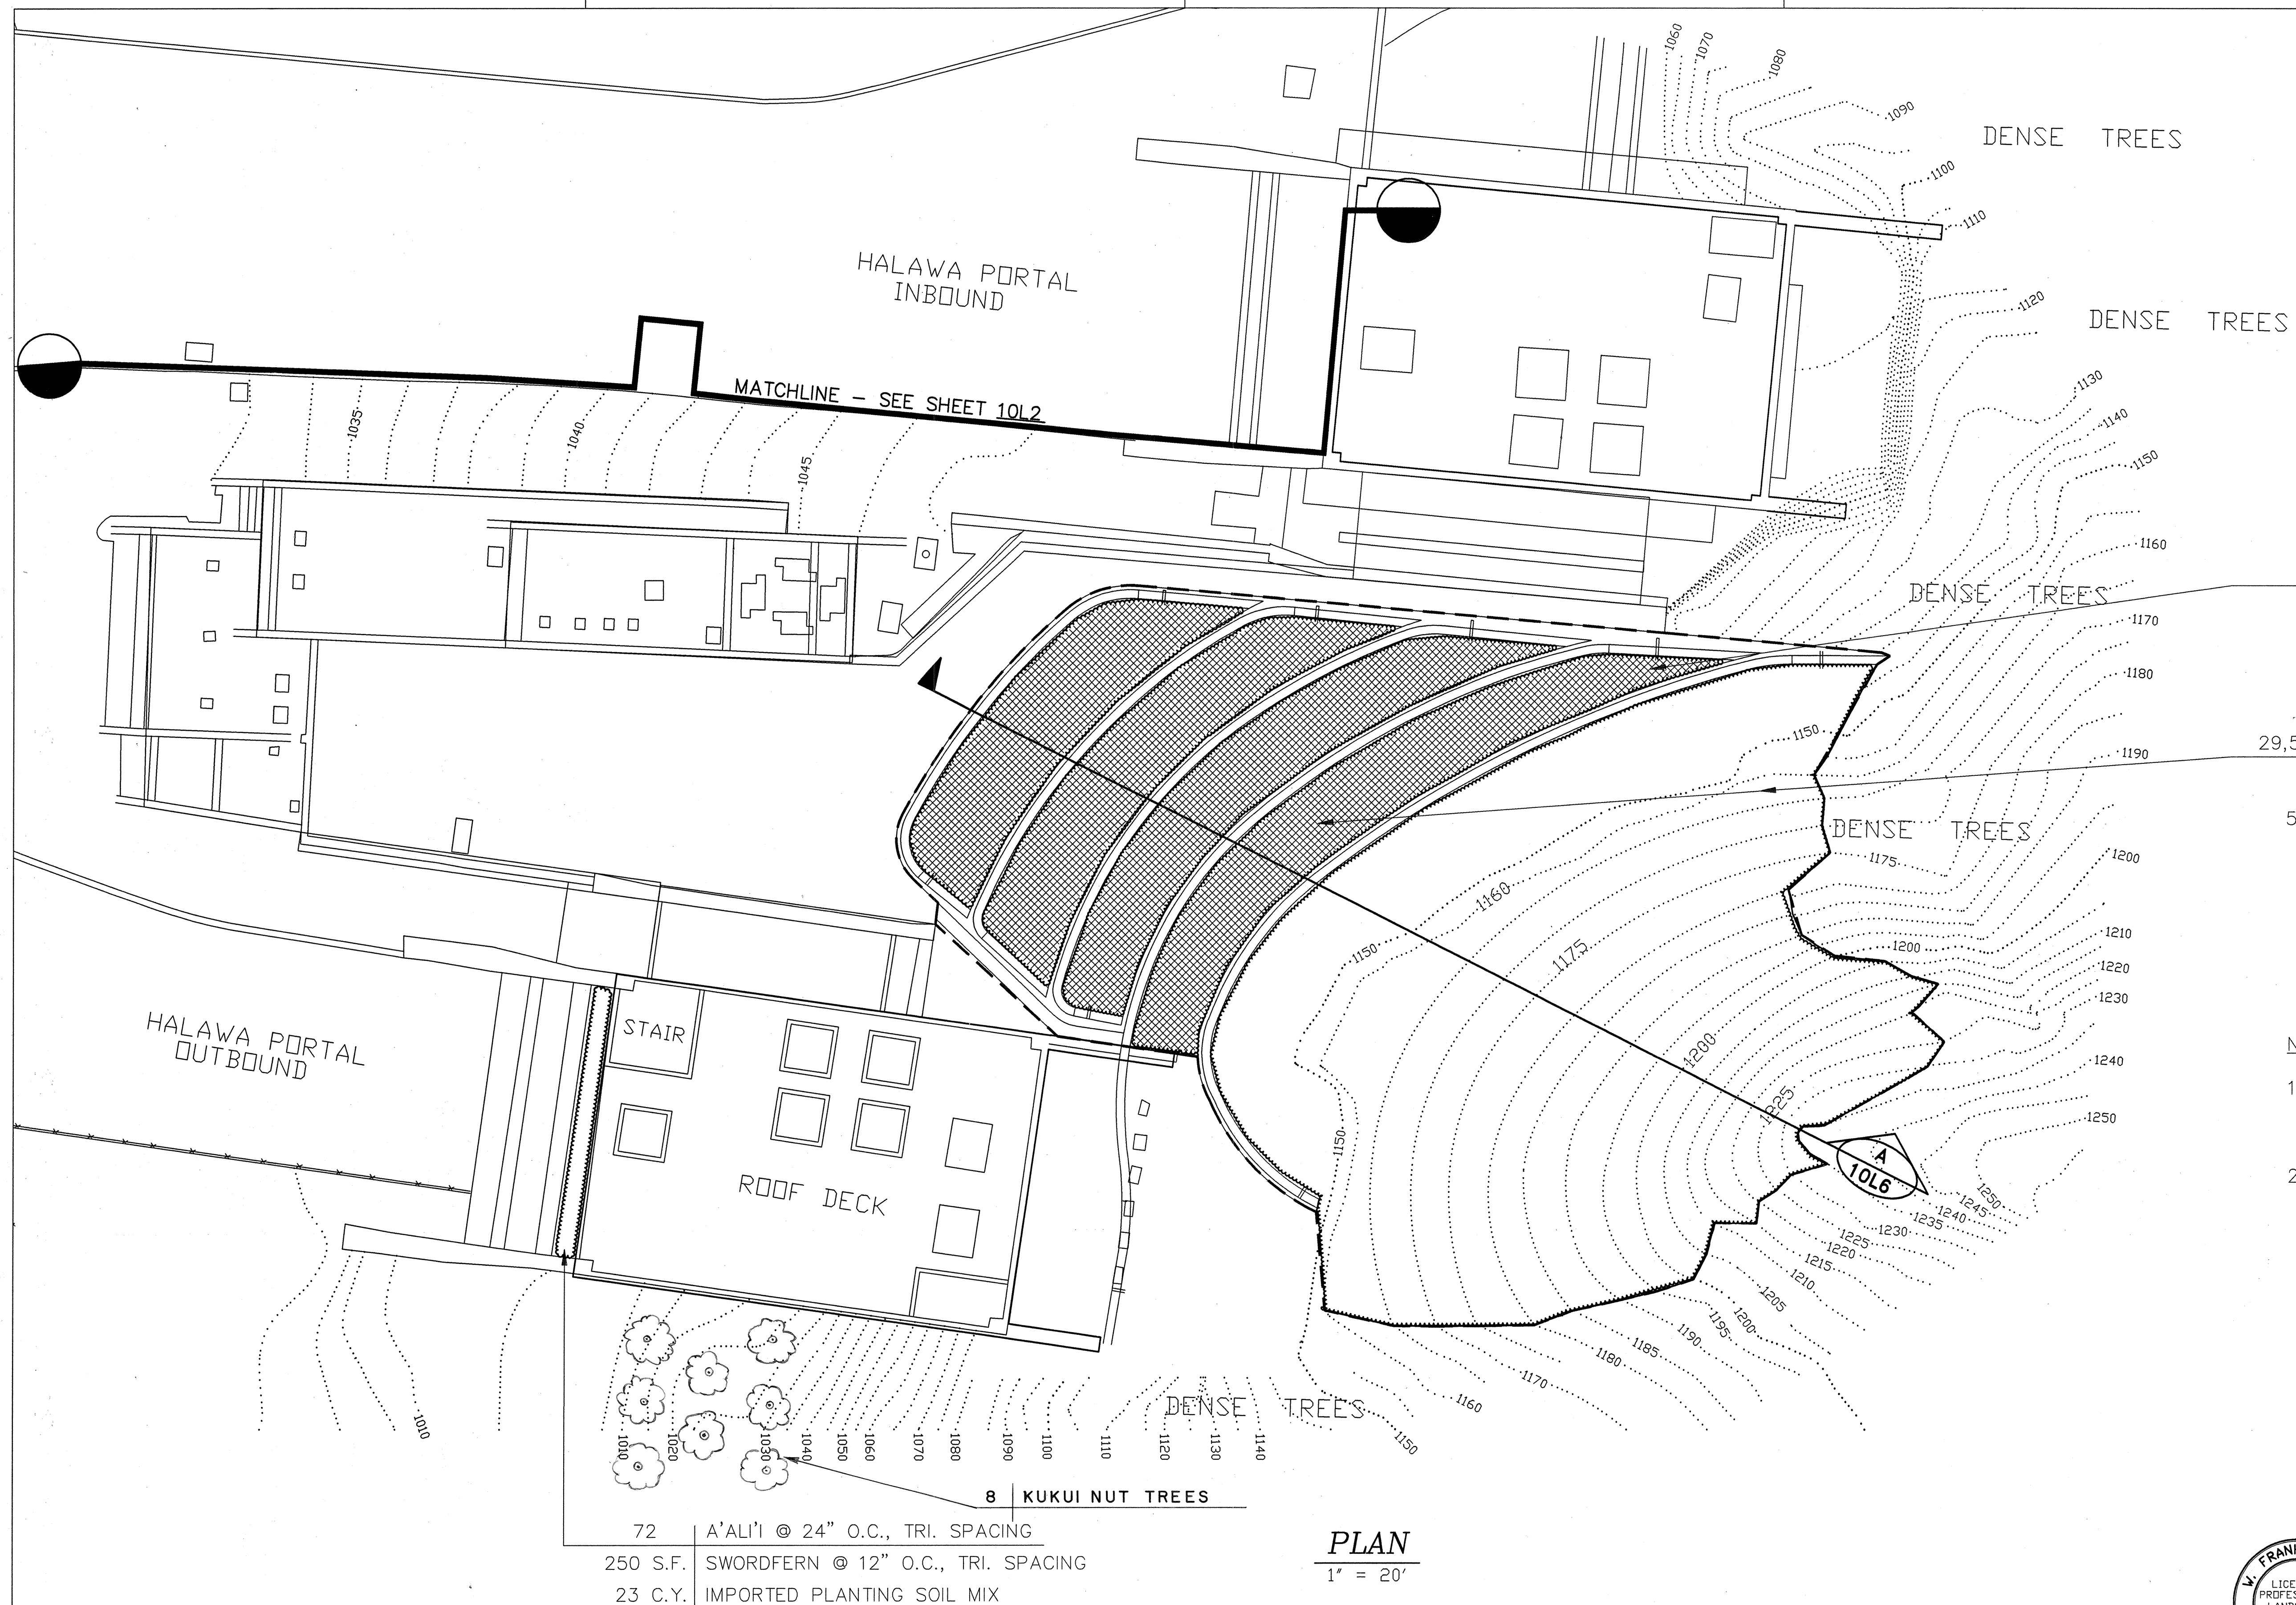

190	'OHI'A
190	KOA
75	HAPU'U - ON LOWEST TIER ONLY

29,500 S.F.	HYDROMULCH SEED
	OVER ALL SLOPED PLANTING AREA
545 C.Y.	IMPORTED PLANTING SOIL MIX

NOTES:

1. CONTRACTOR SHALL NOTIFY ENGINEER FIVE (5) DAYS IN ADVANCE OF ALL PLANTING FOR FIELD DIRECTION.
2. FOR PLANTER AT TUNNEL STRUCTURE PORTAL, SEE SHEETS AN5, AN11 AND A2 FOR CLARIFICATION AND ACCESS.

DATE	REVISION

STATE OF HAWAII
 DEPARTMENT OF TRANSPORTATION
 HIGHWAYS DIVISION

PLANTING PLAN - HALAWA KNOLL

LANDSCAPE

H-3 FINISH (UNIT III)
FAIP NO. I-H3-1(75), UNIT III
T.K. TUNNEL/ACCESS ROADS

SCALE: 1"=20'
DATE: JUNE 199


SHEET NO.
10L1
OF
6
SHEETS




THIS WORK WAS PREPARED BY M
OR UNDER MY SUPERVISION.




GRAPHIC SCALE

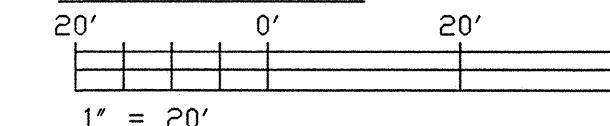


ORIGINAL PLAN	SURVEY PLUTTED BY	DATE
	DRAWN BY	
	TRACED BY	
	DESIGNED BY	
	QUANTITIES BY	
	CHECKED BY	
NO.		12/94

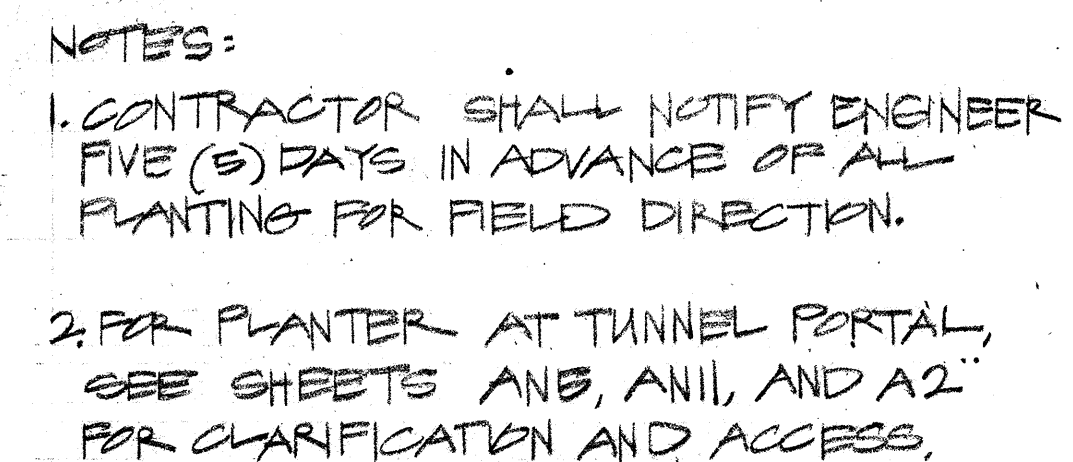


THIS WORK WAS PREPARED BY M
OR UNDER MY SUPERVISION

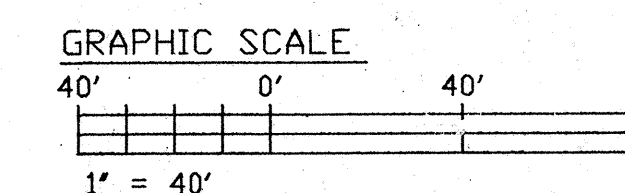

FED. ROAD DIST. NO.	STATE	FED. AID PROJ. NO.	FISCAL YEAR	SHEET NO.	TOTAL SHEETS
HAWAII	HAW.	I-H3-1(75) UNIT III	1994	353	353

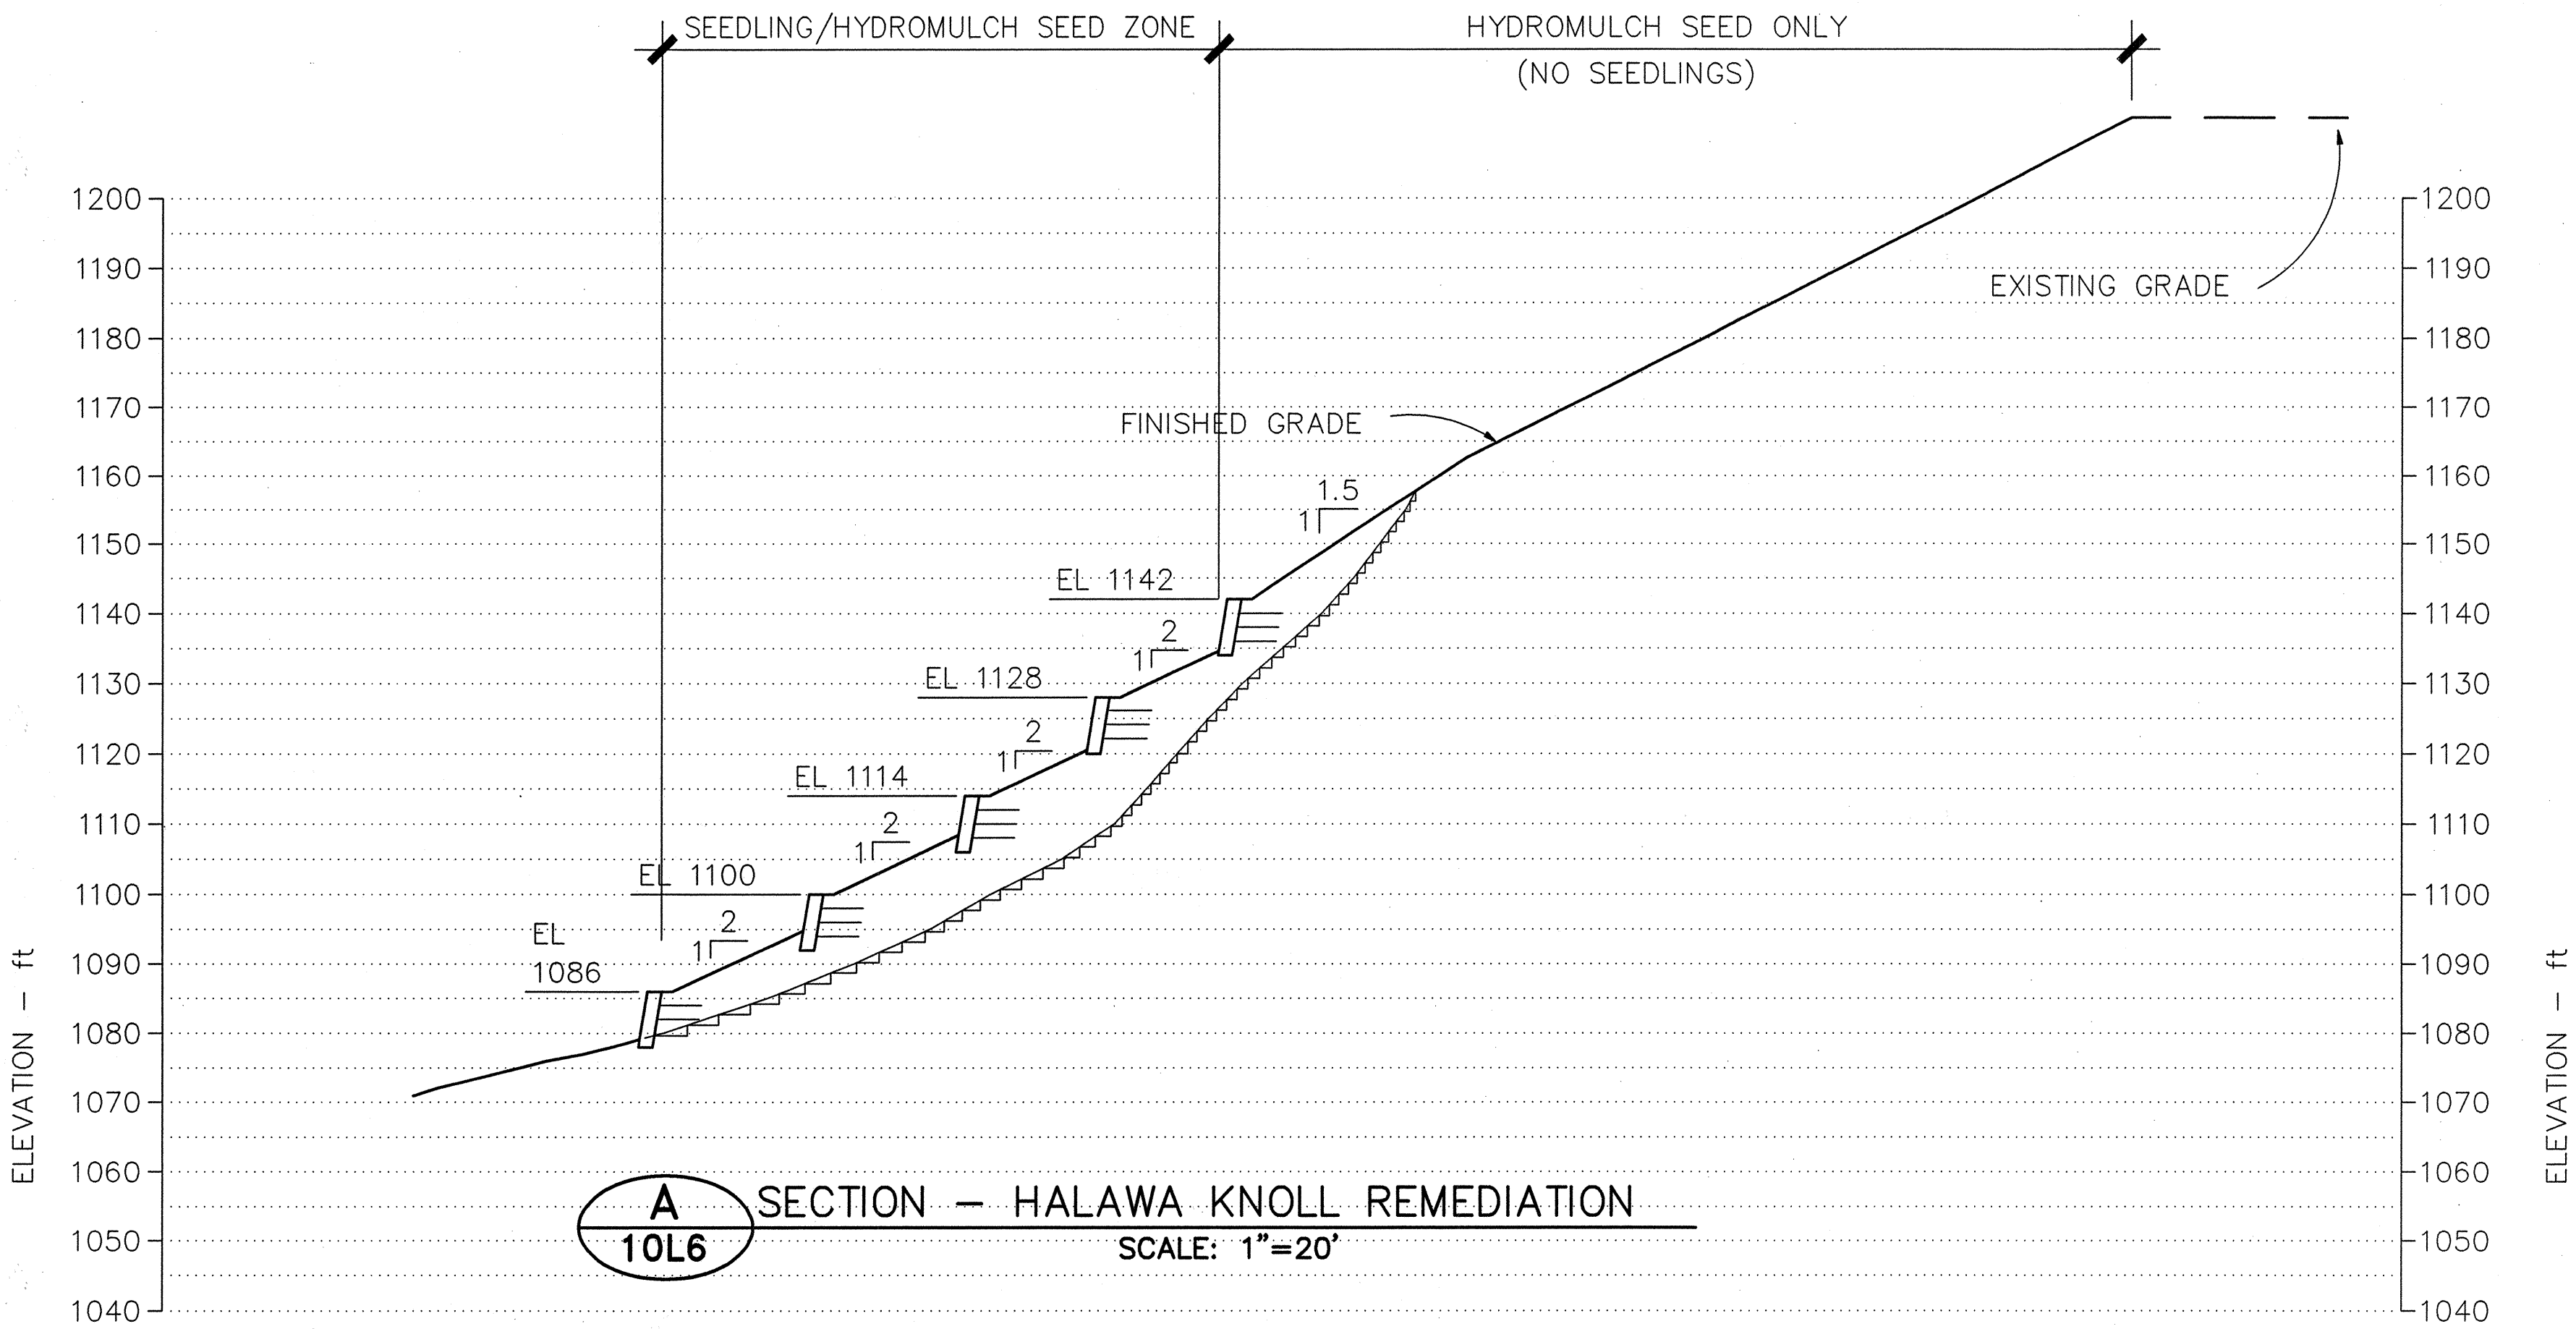


P L A N T L I S T					
QUANTITY	COMMON NAME	BOTANICAL NAME	SIZE	HEIGHT	REMARKS
P L A N T A L L O W A N C E					
T R E E S					
665	Ohia	Metrosideros polymorpha	seedling	6"-24"	5' o.c.
665	Koa	Acacia koa	seedling	6"-24"	5' o.c.
40	Native Hibiscus	Hibiscus punaluensis	seedling	6"-24"	
P A L M S					
25	Loulu	Pritchardia martii	1 gal.	6"-24"	
S H R U B S					
1230	Hapu'u	Cibotium glaucum		6"-12"	trunk height
2,393	A'ali'i	Dodonaea viscosa	6" pots	4"-8"	
G R O U N D C O V E R S					
1000 s.f.	Swordfern	Nephrolepis cordifolia	4" pots		12" o.c.
G R A S S					
91,010 s.f.	Grass Mixture		hydromulch seed		See Specifications
M I S C E L L A N E O U S					
1081 c.y.	Imported Planting Soil Mix				See Specifications
2640 c.y.	Imported Planting Soil				See Specifications

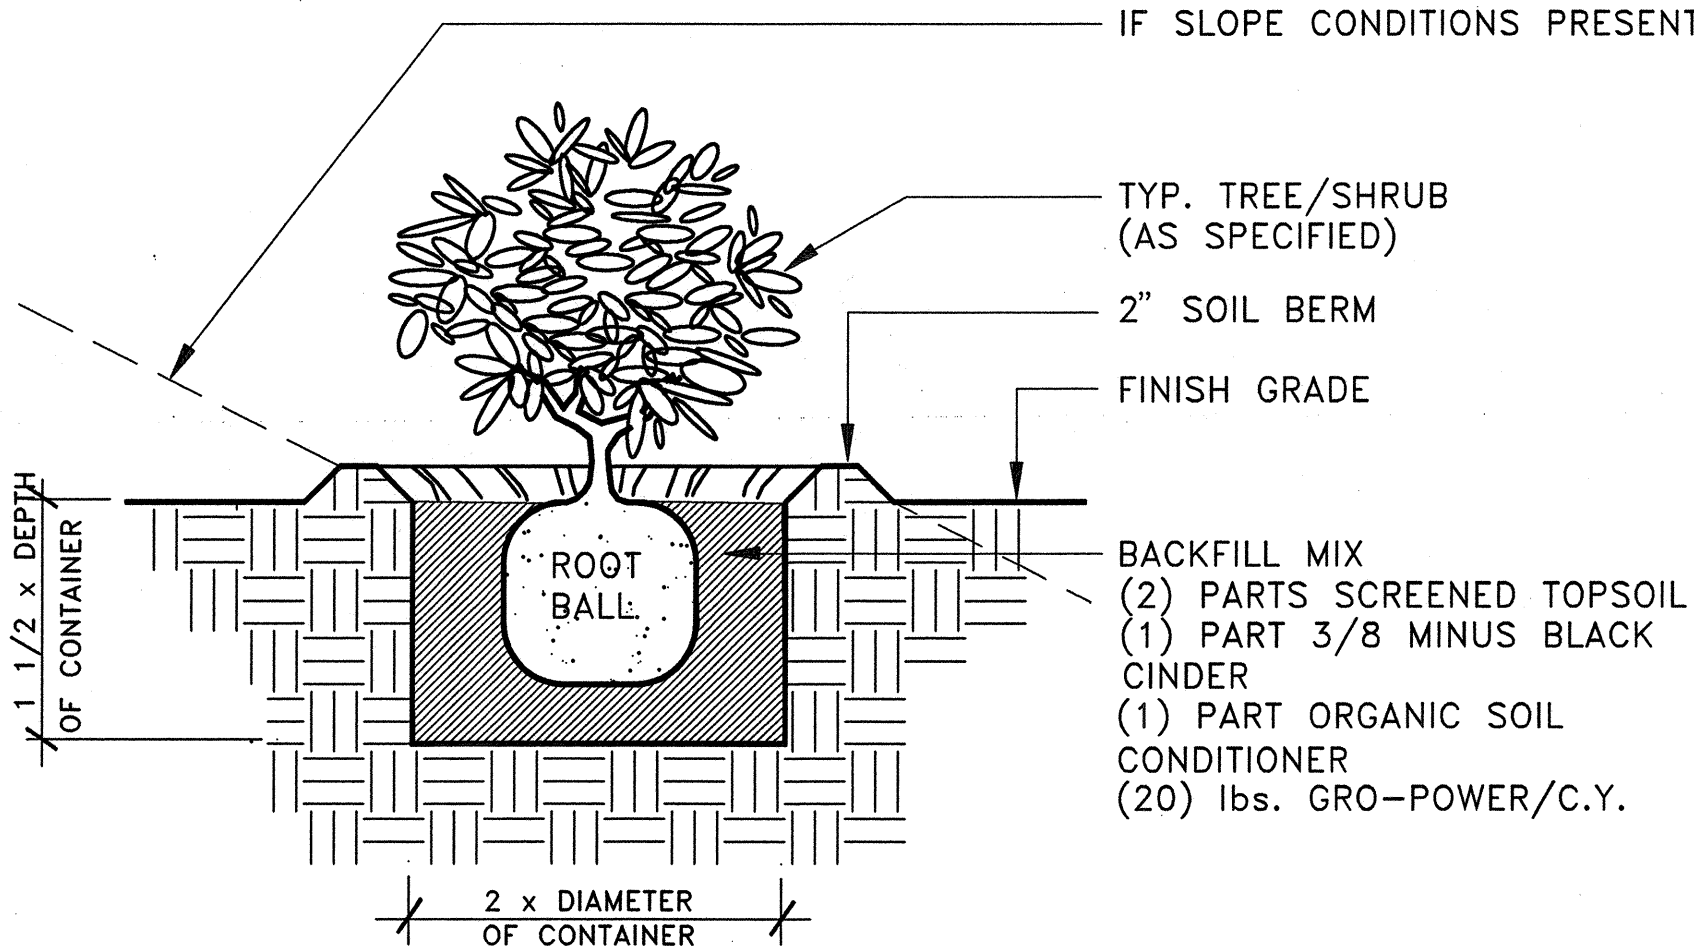

- PLANT NOTES:
- Contractor shall field verify all plant quantities and dimensions prior to installation. Quantities shown in Plant List are for convenience only. Plans shall govern.
 - Contractor shall notify and meet with the Engineer prior to plant installation for verification and interpretation of plans. The Engineer will field direct all plant locations.
 - Contractor shall notify the Engineer of any discrepancies in plant locations or insufficient plant quantities due to differences in plan and actual field conditions.
 - Contractor shall notify the Engineer 30 days prior to planting operations for approval of all plant material at place of growth. All plant material not approved by the Engineer will be subject to rejection.

ORIGINAL PLAN	DATE
DRAWN BY	M. SHIMATSU/CH
DESIGNED BY	
CHECKED BY	T. BLACK
NO.	01/95

1 TREE/SHRUB PLANTING DETAIL
10L6 NOT TO SCALE CADD REF: P-201

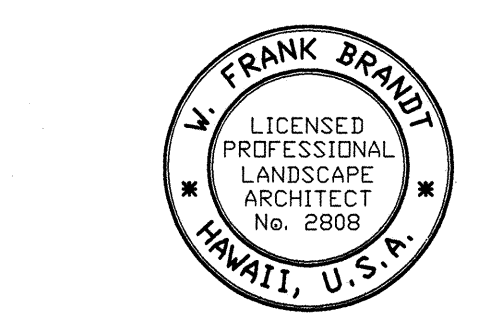

THIS WORK WAS PREPARED BY ME OR UNDER MY SUPERVISION

DATE	REVISION
STATE OF HAWAII DEPARTMENT OF TRANSPORTATION HIGHWAYS DIVISION SECTION, DETAIL AND PLANT LIST LANDSCAPE H-3 FINISH (UNIT III) FAIP NO. I-H3-1(75), UNIT III T.K. TUNNELL/ACCESS ROADS SCALE: AS NOTED DATE: JUNE 1995 SHEET NO. 10L6 OF 6 SHEETS	