| FED. ROAD DIST. NO. | STATE | PROJ. NO. | FISCAL YEAR | SHEET NO. | TOTAL SHEETS |
|---|---|---|---|---|---|
| HAWAII | HAW. | LT-K-05-78 | | 22 | 22 |

PHASE III

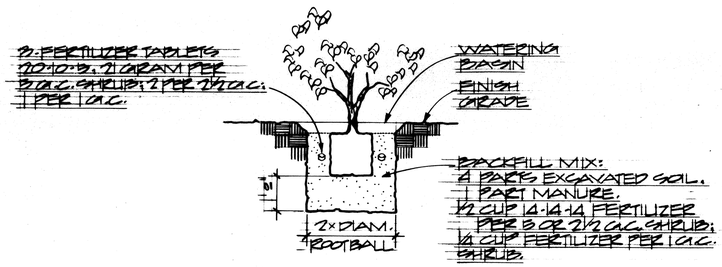


SHRB PLANTING DETAIL
NO SCALE

## PLANT LIST

| QUANTITY | COMMON NAME ○ BOTANICAL NAME | SIZE |
|---|---|---|
| 84 | FORMOSAN KOA ○ ACACIA CONFUSA | 7'-0" HIGH, 4'-0" SPREAD |
| 37 | RAINBOW SHOWER ○ CASSIA JAVANICA × C. FISTULA | 7'-0" HIGH, 4'-0" SPREAD |
| 18 | HONG KONG ORCHID ○ BAUHINIA BLAKEANA | 7'-0" HIGH, 4'-0" SPREAD |
| 1,900 | PINK BUTTERFLY HIBISCUS ○ HIBISCUS SPP. | 3'-0" HIGH |
| 258,000 S.F. | BERMUDA GRASS ○ CYNODON DACTYLON | SEED |
| 6,400 L.F. | POLY DIVIDER "BLACK DIAMOND" | |

NOTES:

1. CONTRACTOR SHALL BE RESPONSIBLE TO VERIFY ALL QUANTITIES, MEASUREMENTS AND SITE CONDITIONS INCLUDING LOCATIONS OF UNDERGROUND UTILITY LINES.
2. PRIOR TO EXCAVATION, ALL TREE PLANTING LOCATIONS SHALL BE STAKED BY THE CONTRACTOR FOR APPROVAL BY THE ENGINEER.
3. ALL QUANTITIES INDICATED ON PLAN AND PLANT LIST ARE ONLY APPROXIMTE. CONTRACTOR SHALL VERIFY ALL QUANTITIES BEFORE BIDDING. CONTRACTOR SHALL PROVIDE SUFFICIENT QUANTITIES TO FULLFILL INTENT OF PLAN WITH PLANTS AND OTHER SPECIFIED MATERIALS AT LOCATIONS, SPACING, AND DEPTHS INDICATED.

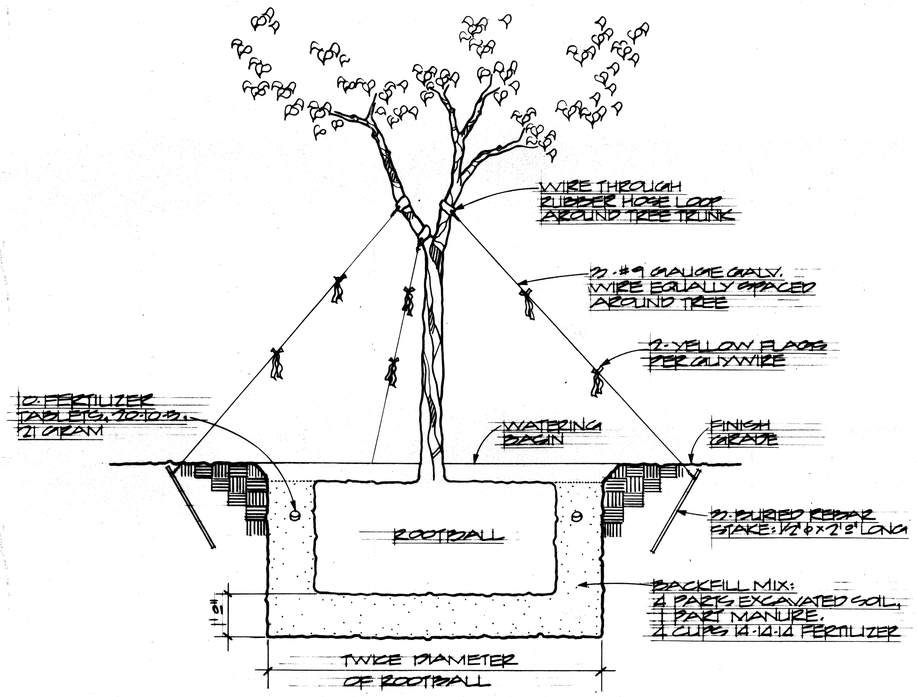


25 GAL. TREE PLANTING DETAIL
NO SCALE

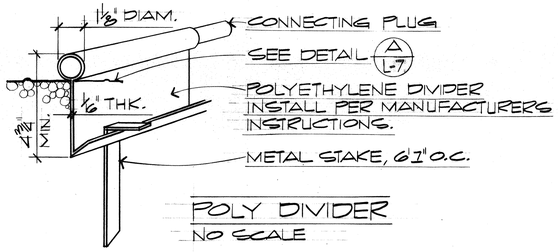


POLY DIVIDER
NO SCALE

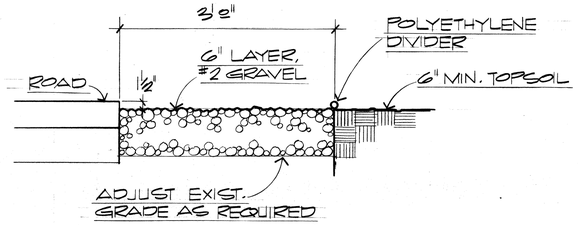


A L-7 TYPICAL GRAVEL STRIP
NO SCALE

| ORIGINAL PLAN | SURVEY PLOTTED BY | DATE |
|---|---|---|
| | DRAWN BY | |
| NOTE BOOK | TRACED BY | |
| No. | DESIGNED BY | |
| | QUANTITIES BY | |
| | CHECKED BY | |

MELVIN K. F. LAU
REGISTERED PROFESSIONAL LANDSCAPE ARCHITECT
No. 2864
HAWAII, U.S.A.

THIS WORK WAS PREPARED BY ME OR UNDER MY SUPERVISION.
Signature

STATE OF HAWAII
DEPARTMENT OF TRANSPORTATION
HIGHWAYS DIVISION

PLANT LIST & DETAILS

LIHUE AIRPORT
GATEWAY BEAUTIFICATION
PROJECT NO. LT-K-05-78 PHASE III

SCALE: NO SCALE DATE:

SHEET No. L-7 OF 7 SHEETS