FED. ROAD DIST. NO.	STATE	FED. AID PROJ. NO.	FISCAL YEAR	SHEET NO.	TOTAL SHEETS
HAWAII	HAW.	STP-037-1(025)	2012	1	22

37

INDEX TO DRAWINGS

SHEET NO.	DESCRIPTION
1	TITLE SHEET
2	STANDARD PLANS SUMMARY
3	GENERAL NOTES AND LEGEND
4 – 5	WATER POLLUTION & EROSION CONTROL NOTES
6 – 7	TYPICAL SECTIONS & DETAILS
8	PAVEMENT MARKINGS LEGEND, DETAILS AND NOTES
9	WORK ZONE SIGNING PLAN, NOTES & DETAILS
10 – 22	ROADWAY & PAVEMENT MARKING PLANS

STATE OF HAWAII

DEPARTMENT OF TRANSPORTATION

HIGHWAYS DIVISION

HONOLULU, HAWAII

PLANS FOR

KULA HIGHWAY PAVEMENT PREVENTIVE MAINTENANCE

KEKAULIKE AVENUE TO LOWER KULA ROAD

FEDERAL-AID PROJECT NO. STP-037-1(025)

DISTRICT OF MAKAWAO

ISLAND OF MAUI

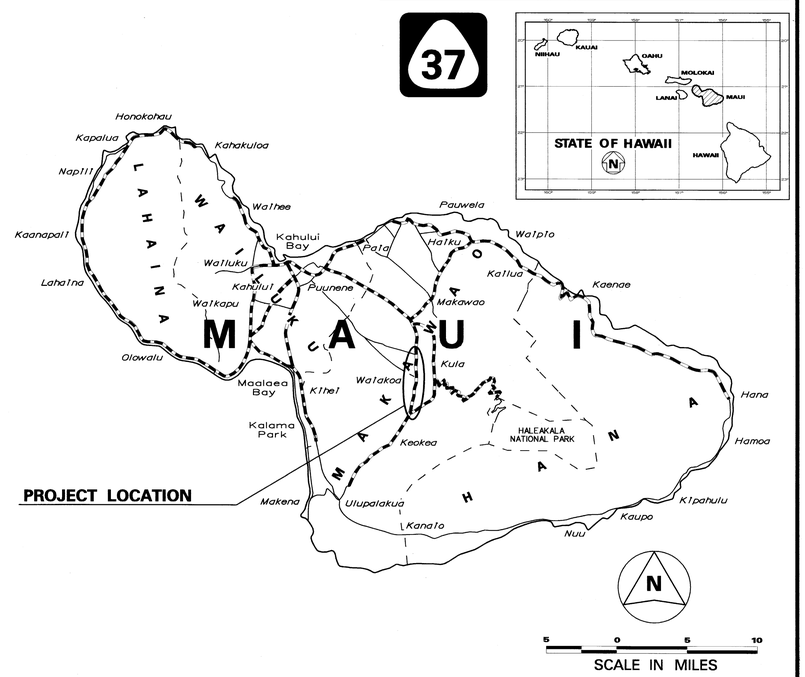

FEDERAL AID PROJECTS PREVIOUSLY CONSTRUCTED OR UNDER CONSTRUCTION

MILE POST 13.95 TO MILE POST 8.79

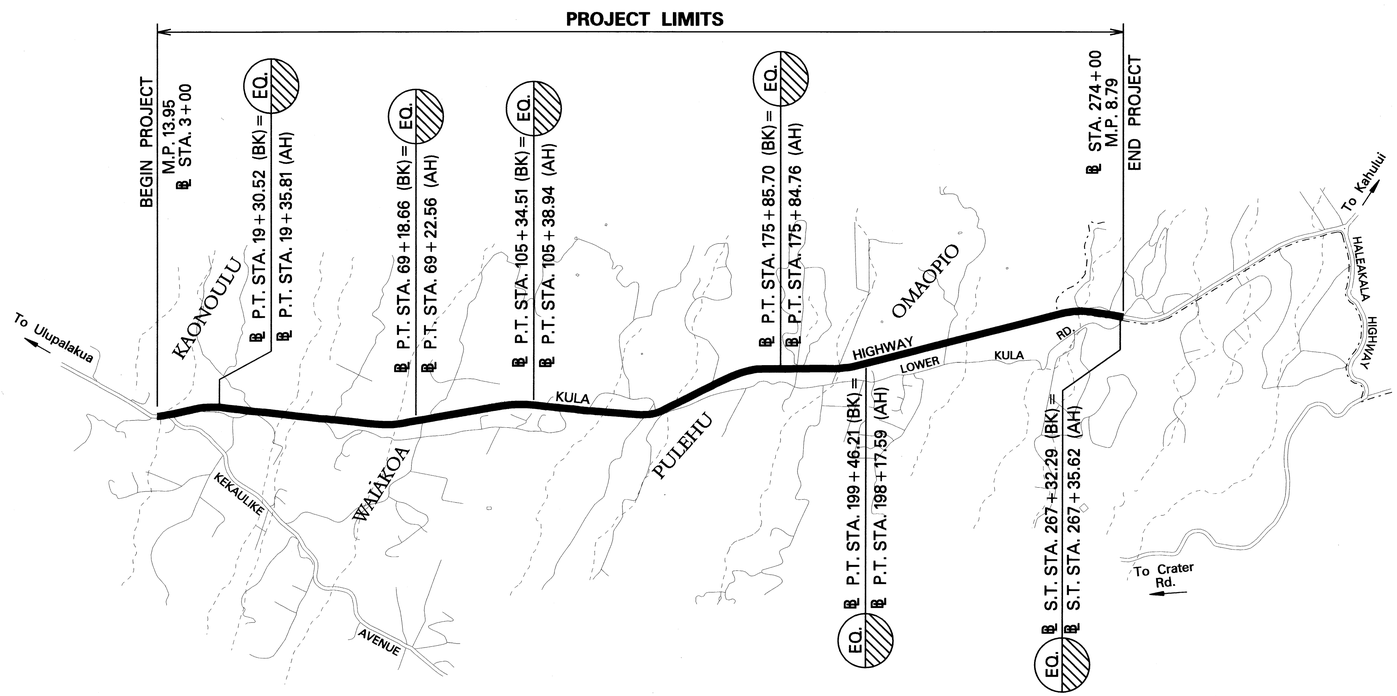

LAYOUT PLAN

GROSS LENGTH OF PROJECT..... 5.16 MILES

NET LENGTH OF PROJECT..... 5.16 MILES

DESIGN DESIGNATION

TRAFFIC DATA	KULA HIGHWAY, LOWER KULA RD. TO OMAOPIO RD. (8.83 to 10.03 MP)	KULA HIGHWAY, OMAOPIO RD. TO KULA ELEM. SCHOOL (10.03 to 12.68 MP)	KULA HIGHWAY, KULA ELEM. SCHOOL TO KEKAULIKE AVE. (12.68 to 14.22 MP)
ADT (2011)	14,300	8,300	5,500
ADT (2021)	16,800	9,900	6,500
DHV	1,600	900	590
DESIGN K	9.5	10.0	9.0
DESIGN D	65/35	60/40	55/45
DESIGN T	3.0	3.5	3.0
T24	3.5	4.0	4.0

DEPARTMENT OF TRANSPORTATION
STATE OF HAWAII

APPROVED:

FOR DIR. OF TRANSPORTATION — DATE 8-17-11

HWY-M DESIGNED BY	HWY-ME P. S. & E. BY	873-3535 PHONE	JULY, 2011 DATE

5kuimsht.dgn/jay